



www.impactwiremarking.com

NYLON CABLE TIES


Whether you call them zip ties, wire ties or tie wraps, these are the cable ties you are looking for. We carry an assortment of lengths and tensile strengths to accommodate your bundling needs.

Our nylon 6/6 cable ties meet UL 94V-2 flammability ratings and work in a temperature range from -40°F to 185°F (continuous temperature up to 150°F). Our black cable ties are rated for outdoor applications and are UV stabilized.

An installation tool is available for tightening and cutting off the excess tail.

When placing your order, please specify the following items (part numbers can be found below):

- Tensile Strength
- Length
- Color (black or natural)
- Quantity

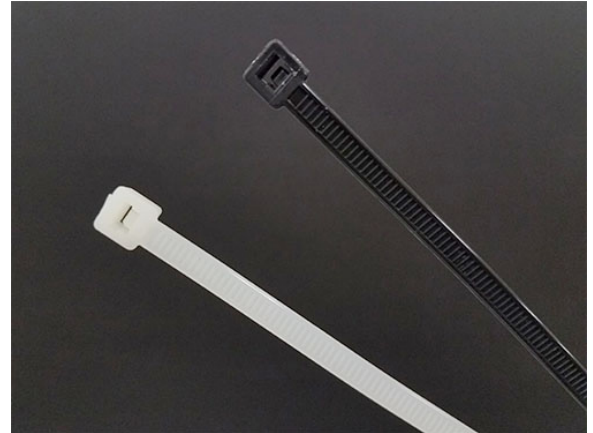

MORE AVAILABLE UPON REQUEST

Additional sizes, colors and plenum cable ties are available. Plenum cable ties meet UL and NEC standards.

Tensile Strength	Length									
18 LB	4" IMP-18-4-*	5" IMP-18-5-*	8" IMP-18-8-*	15" IMP-18-15-*						
40 LB	5" IMP-40-5-*	8" IMP-40-8-*	11" IMP-40-11-*	14" IMP-40-14-*						
50 LB	7" IMP-50-7-*	11" IMP-50-11-*	14" IMP-50-14-*	17" IMP-50-17-*	21" IMP-50-21-*	25" IMP-50-25-*	29" IMP-50-29-*	33" IMP-50-33-*	36" IMP-50-36-*	
120 LB	8" IMP-120-8-*	9" IMP-120-9-*	14" IMP-120-14-*	18" IMP-120-18-*	24" IMP-120-24-*	30" IMP-120-30-*	36" IMP-120-36-*			
175 LB	17" IMP-175-17-*	18" IMP-175-18-*	21" IMP-175-21-*	24" IMP-175-24-*	32" IMP-175-32-*	36" IMP-175-36-*	48" IMP-175-48-*	60" IMP-175-60-*		

Part Number Example: IMP-18-8-NL = Nylon, 18lb, 8", Natural

- * Part Number Color Key
- BK (Black)
 - NL (Natural)