



www.impactwiremarking.com

NYLON CABLE TIES


Whether you call them zip ties, wire ties or tie wraps, these are the cable ties you are looking for. We carry an assortment of lengths and tensile strengths to accommodate your bundling needs.

Our nylon 6/6 cable ties meet UL 94V-2 flammability ratings and work in a temperature range from -40°F to 185°F (continuous temperature up to 150°F). Our black cable ties are rated for outdoor applications and are UV stabilized.

An installation tool is available for tightening and cutting off the excess tail.

When placing your order, please specify the following items (part numbers can be found below):

- Tensile Strength
- Length
- Color (black or natural)
- Quantity

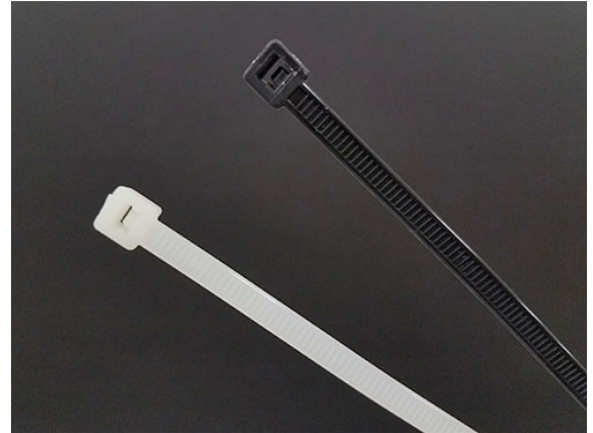

MORE AVAILABLE UPON REQUEST

Additional sizes, colors and plenum cable ties are available. Plenum cable ties meet UL and NEC standards.

Tensile Strength	Length									
18 LB	4" IMP-18-4-*	5" IMP-18-5-*	8" IMP-18-8-*	15" IMP-18-15-*						
40 LB	5" IMP-40-5-*	8" IMP-40-8-*	11" IMP-40-11-*	14" IMP-40-14-*						
50 LB	7" IMP-50-7-*	11" IMP-50-11-*	14" IMP-50-14-*	17" IMP-50-17-*	21" IMP-50-21-*	25" IMP-50-25-*	29" IMP-50-29-*	33" IMP-50-33-*	36" IMP-50-36-*	
120 LB	8" IMP-120-8-*	9" IMP-120-9-*	14" IMP-120-14-*	18" IMP-120-18-*	24" IMP-120-24-*	30" IMP-120-30-*	36" IMP-120-36-*			
175 LB	17" IMP-175-17-*	18" IMP-175-18-*	21" IMP-175-21-*	24" IMP-175-24-*	32" IMP-175-32-*	36" IMP-175-36-*	48" IMP-175-48-*	60" IMP-175-60-*		

Part Number Example: IMP-18-8-NL = Nylon, 18lb, 8", Natural

- * Part Number Color Key
- BK (Black)
 - NL (Natural)



www.impactwiremarking.com

STAINLESS STEEL CABLE TIES

Stainless steel cable ties are ideal for bundling and securing cables, wires and assemblies even amidst extreme temperatures and severe environmental conditions.


These cable ties are well suited for marine, waste water treatment plants, chemical and food facilities, hospitals, paper mills and heat exchangers. The self-locking mechanism allows for quick and easy installation.

To fasten, simply insert the tail into the buckle. The internal locking ball rolls freely as the stainless steel cable tie is tightened. These cable ties offer a tensile strength of 100 lbs or 250 lbs and resist corrosion.

An installation tool is available for tightening and cutting off the excess tail.

When placing your order, please specify the following items (part numbers can be found below):

- Tensile Strength
- Length
- Quantity

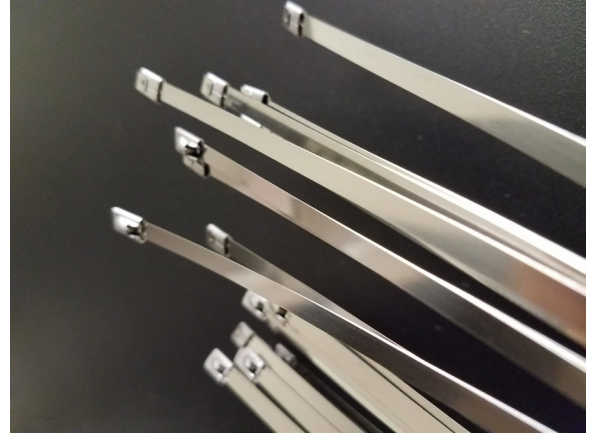

Tensile Strength	Length							
	5"	8"	11"	14"	21"	27"	33"	42"
100 LB	5" Bundle Dia: 1.3 IMP-100-5-SS	8" Bundle Dia: 1.97 IMP-100-8-SS	11" Bundle Dia: 2.99 IMP-100-11-SS	14" Bundle Dia: 4.00 IMP-100-14-SS	21" Bundle Dia: 6.14 IMP-100-21-SS	27" Bundle Dia: 8.15 IMP-100-27-SS	33" Bundle Dia: 10.10 IMP-100-33-SS	42" Bundle Dia: 12.00 IMP-100-42-SS
250 LB	8" Bundle Dia: 1.97 IMP-250-8-SS	11" Bundle Dia: 2.99 IMP-250-11-SS	14" Bundle Dia: 4.00 IMP-250-14-SS	17" Bundle Dia: 5.31 IMP-250-17-SS	20" Bundle Dia: 5.93 IMP-250-20-SS	40" Bundle Dia: 12.30 IMP-250-40-SS	47" Bundle Dia: 14.00 IMP-250-47-SS	60" Bundle Dia: 18.00 IMP-250-60-SS

Part Number Example: IMP-100-5-SS = 100 LB, 5", Stainless Steel