


# ACM

(Aluminum Composite Material)

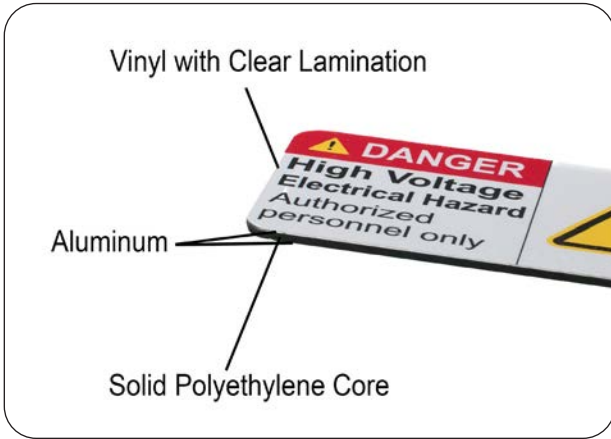

## FEATURES

- Rigid, self-extinguishing
- .012" aluminum with a solid polyethylene core
- Clear overlay for added protection
- Indoor or outdoor applications
- Custom printing, sizes and colors available
- UL 94V-0 and ASTM E-84 Class A Fire Rating
- UL-recognized component for electrical signage
- About 1/2 the weight of a solid aluminum sheet
- Will not bend in the elements

## PERFORMANCE & PHYSICAL DATA

CHARACTERISTIC	VALUE
Material	Two .012" aluminum with a solid polyethylene core
Thickness	3 mm
Flash Point:	Composites - (ASTM D-1929) >784 °F
Melting Point:	Aluminum > 890 °F / Core > 210 °F
Flammability:	Not Flammable