


# POLYSTYRENE

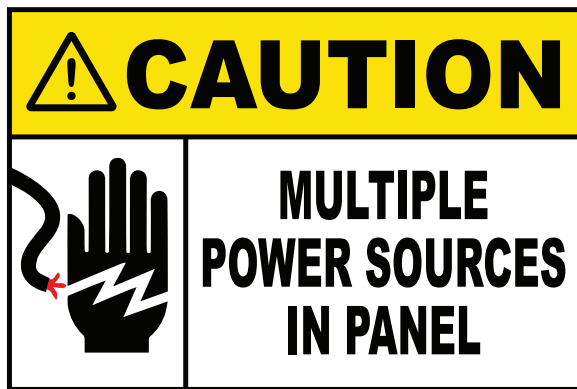

## FEATURES

- Designed for thin, lightweight signage
- Indoor or outdoor applications
- Custom sizes
- UL recognized

## PERFORMANCE & PHYSICAL DATA

CHARACTERISTIC	VALUE
Material	High Impact Polystyrene
Thickness	.060 "
Vicat Softening Point	185 °F
Melting Point	>270 °F