



# CUSTOM SIGNAGE

## ACM (Aluminum Composite Material)

These custom signs are made from highly durable, rigid and self-extinguishing Aluminum Composite Material (ACM). Graphics are printed on premium vinyl with UV stable ink. A clear overlay is applied for supreme outdoor durability with abrasion and additional UV protection.

ACM is a UL-recognized component for electrical signage and is UL 94V-0 and ASTM E-84 Class A Fire rated. It is comprised of a solid polyethylene core sandwiched between two .012" aluminum sheets and is about half the weight of a solid aluminum sheet. This material will not bow in the elements and is of top quality for sign applications.

### FEATURES

- Rigid, self-extinguishing
- .012" aluminum with a solid polyethylene core
- Clear overlay for added protection
- Indoor or outdoor applications
- Custom printing, sizes and colors available
- UL 94V-0 and ASTM E-84 Class A Fire Rating
- UL-recognized component for electrical signage
- About 1/2 the weight of a solid aluminum sheet
- Will not bend in the elements



CHARACTERISTIC	VALUE
Material	Two .012" aluminum with a solid polyethylene core
Thickness	3 mm
Flash Point:	Composites - (ASTM D-1929) >784 °F
Melting Point:	Aluminum > 890 °F / Core > 210 °F
Flammability:	Not Flammable




# CUSTOM SIGNAGE

*Expanded PVC*

## FEATURES

- Designed for lightweight signage
- Rigid and durable
- Indoor or outdoor applications
- Custom sizes
- Self-extinguishing, Class (A) fire rating under ASTM E-84
- UL recognized

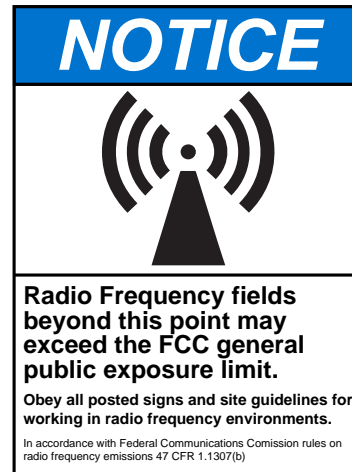

CHARACTERISTIC	VALUE
Material	Moderately Expanded Polyvinyl Chloride (PVC)
Thickness	3 mm
Flash Point	(ASTM) >700 °F
Melting Point	>350 °F
Decomposition Temperature	>392 °F
Flammability	N/A




# CUSTOM SIGNAGE

*Polystyrene*

## FEATURES

- Designed for thin, lightweight signage
- Indoor or outdoor applications
- Custom sizes
- UL recognized

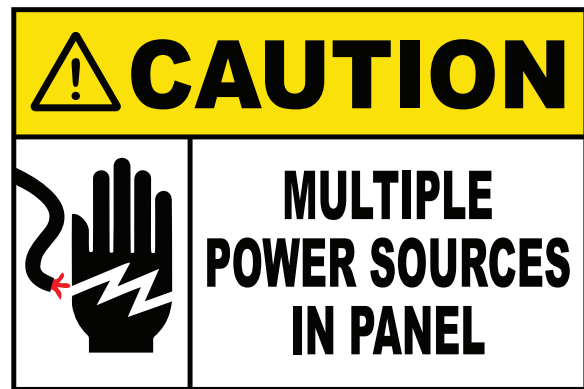

CHARACTERISTIC	VALUE
Material	High Impact Polystyrene
Thickness	.060 "
Vicat Softening Point	185 °F
Melting Point	>270 °F

# CUSTOM SIGNAGE

## Magnet

### FEATURES

- Great option for temporary signage
- Indoor or outdoor applications
- Durable in adverse weather
- Custom sizes



CHARACTERISTIC	VALUE
Material	Magnetized Vinyl Sheet
Thickness	.030"
Service Temperature Rating	-15 °F to 160 °F

\* It is recommended to test application prior to ordering. Magnetism among surfaces vary.



## CONTACT US

---

**Tel. 425.656.0330**

**Fax 425.656.0440**

**[sales@impactwiremarking.com](mailto:sales@impactwiremarking.com)**

**[www.impactwiremarking.com](http://www.impactwiremarking.com)**

**P.O. Box 88068 Seattle, WA 98138**

This information and data is believed to be accurate and reliable. Although the information and recommendations set forth herein are presented in good faith and believed to be correct as of this date, Impact, Inc. makes no representations as to the completeness or accuracy thereof. We place at your disposal the technical information necessary for the correct use of our products. As conditions and methods of use are beyond our control, that the person receiving the same will make their own determination as to the suitability for their purpose. We reserve the right to modify characteristics with the aim of improving the product and adapting it to the requirements of the market.

We are not affiliated or endorsed by Impact Label Corporation (800.820.0362)