



THS - SELF-LAMINATING WIRE MARKERS

Self-laminating thermal transfer printable labels (THS) are for wire and cable labeling. Also known as wrap-around markers and cable labels, these high performance vinyl labels have a white printable area on which to print your data that is protected by the overlapping, clear tail that wraps completely around your wire or cable. This self-laminating feature protects your information from smudging and other abuse.

Our self-laminating labels are used by cable shops, industrial controls, electrical contractors and telecommunications. THS labels are available in our 727 vinyl film with notches for easy printing on the AWMS-245 Plus printer.

FEATURES

- Wrap-around label
- Permanent acrylic pressure sensitive adhesive
- Compatible with the AWMS-245 Plus printer


MATERIAL

- Clear matte flexible vinyl film
- -40°F to 302°F
- Custom colors available upon request



Popular THS Sizes

**Other sizes available with minimum order quantities*

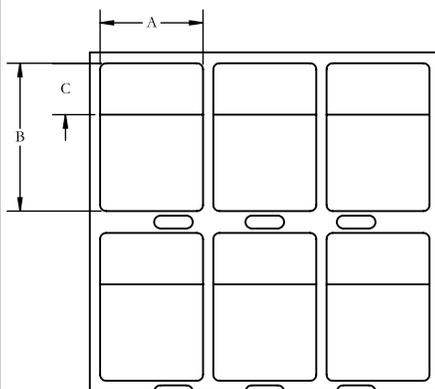

Prod. Code	Part Number	Width (A)	Height (B)	Print Height (C)	Cable Dia (Min - Max)
664	THS-202-727	1.00 in.	2.25 in.	0.75 in.	0.24 in. - 0.48 in.
657	THS-204-727	2.00 in.	2.25 in.	0.75 in.	0.24 in. - 0.48 in.
647	THS-205-727	1.00 in.	1.50 in.	0.50 in.	0.16 in. - 0.32 in.
658	THS-206-727	2.00 in.	3.75 in.	1.00 in.	0.32 in. - 0.88 in.
654	THS-224-727	1.50 in.	1.50 in.	0.50 in.	0.16 in. - 0.32 in.
661	THS-234-727	2.00 in.	1.38 in.	0.50 in.	0.16 in. - 0.28 in.
668	THS-236-727	2.00 in.	1.75 in.	0.50 in.	0.16 in. - 0.40 in.
665	THS-241-727	0.30 in.	0.94 in.	0.38 in.	0.12 in. - 0.18 in.
671	THS-247-727	2.00 in.	5.90 in.	1.50 in.	0.48 in. - 1.40 in.
673	THS-249-727	1.88 in.	9.56 in.	3.19 in.	1.02 in. - 2.03 in.
679	THS-267-727	2.00 in.	4.00 in.	1.00 in.	0.32 in. - 0.95 in.

THS - SELF-LAMINATING WIRE MARKERS

Technical Data

General Description

Impact, Inc.'s 727 THS film is a clear, matte, flexible, vinyl film with a permanent acrylic pressure sensitive adhesive backed with a bleached Kraft release liner. Film is resistant to water and oil exposure.

727 THS Film Data

PRODUCT DATA

VALUE

Physical Properties

Thickness (mil)	film:	3.5 +/- 10%
	adhesive:	0.8-0.9 +/- 0.1
	liner:	3.1 +/- 10%
Dimensional Stability (%)	MD:	0.75
	TD:	.50

Adhesion Properties

Adhesion from	Average (oz/in)
Stainless Steel	57
Acrylic	92
Glass	81
Expected Sheer (hours)	40
Tack (gm)	530
Expected Exterior Life	2 yrs.
Service Temp. Range	-40°F to 302°F
Minimum Application Temp.	50°F
Storage Stability	1 yr. stored @ 70°F and 50%RH



THS - SELF-LAMINATING WIRE MARKERS

Available Sizes

*Minimum order quantities may apply

Prod. Code	Part Number	Labels Across	Labels/Roll	Width (A)	Height (B)	Print Height (C)	Cable Dia (Min - Max)
665	THS-241-727	10	10,000	0.300	0.940	0.38	0.12 in. - 0.18 in
637	THS-227-727	6	10,000	0.500	1.500	0.50	0.16 in - 0.32 in
	THS-200-727	7	10,000	0.500	1.440	0.50	0.16 in - 0.30 in
	THS-192-727	4	10,000	0.500	0.750	0.37	0.12 in - 0.12 in
	THS-242-727	3	10,000	0.500	0.940	0.33	0.11 in - 0.19 in
	THS-264-727	8	10,000	0.500	0.750	0.25	0.08 in - 0.16 in
639	THS-226-727	5	10,000	0.600	1.500	0.50	0.16 in - 0.32 in
640	THS-222-727	6	5,000	0.670	2.250	0.75	0.24 in - 0.48 in
642	THS-225-727	4	10,000	0.750	1.500	0.50	0.16 in - 0.32 in
643	THS-201-727	4	10,000	0.800	1.440	0.50	0.16 in - 0.30 in
645	THS-215-727	4	10,000	0.880	1.440	0.50	0.16 in - 0.30 in
649	THS-203-727	3	5,000	1.000	3.750	1.00	0.32 in - 0.88 in
664	THS-202-727	3	5,000	1.000	2.250	0.75	0.24 in - 0.48 in
647	THS-205-727	3	5,000	1.000	1.500	0.50	0.16 in - 0.32 in
	THS-253-727	3	2,500	1.000	6.000	1.50	0.48 in - 1.43 in
650	THS-208-727	3	2,000	1.000	7.500	1.50	0.48 in - 1.91 in
646	THS-210-727	3	5,000	1.000	0.750	0.38	0.12 in - 0.12 in
	THS-254-727	3	10,000	1.000	1.44	0.50	0.16 in - 0.30 in
	THS-269-727	4	10,000	1.000	1.500	0.50	0.16 in - 0.32 in
648	THS-220-727	4	5,000	1.000	2.250	0.75	0.24 in - 0.48 in
	THS-237-727	3	5,000	1.000	2.500	0.75	0.24 in - 0.58 in
678	THS-259-727	3	1,000	1.000	7.44	1.50	0.48 in - 1.89 in
652	THS-209-727	2	2,500	1.250	2.250	0.75	0.24 in - 0.48 in
653	THS-219-727	3	5,000	1.330	2.250	0.75	0.24in - 0.48 in
654	THS-224-727	2	5,000	1.500	1.500	0.50	0.16 in - 0.32 in
	THS-270-727	2	5,000	1.500	1.250	0.50	0.16 in - 0.24 in
	THS-231-727	2	2,500	1.500	2.250	0.75	0.24 in - 0.48 in
	THS-271-727	1	5,000	1.500	1.250	0.50	0.16 in - 0.24 in
655	THS-213-727	2	5,000	1.750	1.440	0.50	0.16 in - 0.30 in
674	THS-250-727	2	1,000	1.880	5.700	1.19	0.38 in - 1.44 in
673	THS-249-727	2	1,000	1.880	9.560	3.19	1.02 in - 2.03 in

THS - SELF-LAMINATING WIRE MARKERS

Available Sizes

*Minimum order quantities may apply

Prod. Code	Part Number	Labels Across	Labels/Roll	Width (A)	Height (B)	Print Height (C)	Cable Dia (Min - Max)
656	THS-207-727	2	2,500	1.900	3.190	0.75	0.24 in - 0.78 in
	THS-257-727	2	2,500	1.900	3.190	0.75	0.24 in - 0.78 in
	THS-260-727	2	1,000	1.900	5.940	1.50	0.48 in - 1.41 in
668	THS-236-727	1	2,000	2.000	1.750	0.50	0.16 in - 0.40 in
657	THS-204-727	2	2,500	2.000	2.250	0.75	0.24 in - 0.48 in
658	THS-206-727	1	1,000	2.000	3.750	1.0	0.32 in - 0.88 in
671	THS-247-727	1	1,000	2.000	5.900	1.50	0.48 in - 1.40 in
	THS-268-727	2	2,500	2.000	2.440	1.00	0.32 in - 0.46 in
679	THS-267-727	2	2,500	2.000	4.000	1.00	0.32 in - 0.95 in
661	THS-234-727	2	5,000	2.000	1.380	0.50	0.16 in - 0.28 in
667	THS-239-727	1	1,250	2.000	2.550	0.50	0.16 in - 0.65 in
677	THS-255-727	2	5,000	2.000	1.440	0.50	0.16 in - 0.30 in
676	THS-256-727	2	1,000	2.000	7.430	1.50	0.48 in - 1.89 in



CONTACT US

Tel. 425.656.0330

Fax 425.656.0440

sales@impactwiremarking.com

www.impactwiremarking.com

P.O. Box 88068 Seattle, WA 98138

This information and data is believed to be accurate and reliable. Although the information and recommendations set forth herein are presented in good faith and believed to be correct as of this date, Impact, Inc. makes no representations as to the completeness or accuracy thereof. We place at your disposal the technical information necessary for the correct use of our products. As conditions and methods of use are beyond our control, that the person receiving the same will make their own determination as to the suitability for their purpose. We reserve the right to modify characteristics with the aim of improving the product and adapting it to the requirements of the market.

We are not affiliated or endorsed by Impact Label Corporation (800.820.0362)